

SPIRAL WOUND GASKETS



SPIRAL WOUND GASKETS (ALSO KNOWN AS FLEX GASKETS)

ARE AVAILABLE IN:


- STANDARD SIZES - IN STOCK
- VARIETY OF METAL WINDING and FILLER MATERIALS
- CUSTOM SIZES AND SHAPES

MANUFACTURED IN ACCORDANCE WITH:

- ASME B16.20

AVAILABLE IN ACCORDANCE WITH MILITARY SPECIFICATIONS:

- MIL-G-24716
- MIL-G-15342

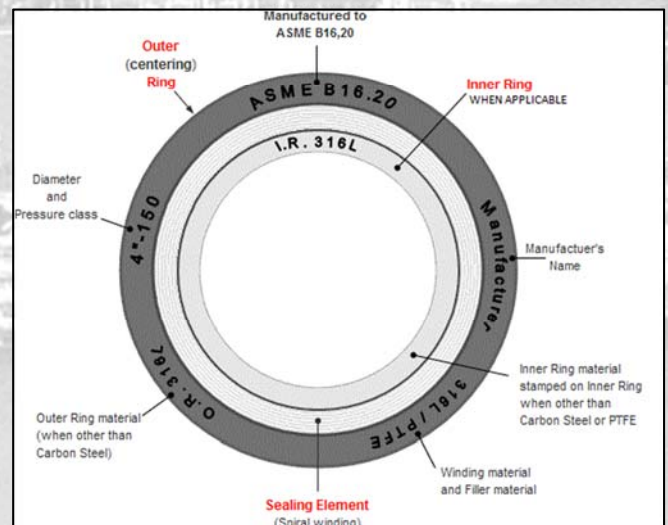


SPIRAL WOUND GASKET METALS & FILLERS

WINDING	NON-METALLIC FILLERS
347SS - 1700°F	GRAPHITE - 950°F
347 SS WINDNGS with GRAPHITE FILLER MEETS MIL-G-24716	
304SS - 1400°F	NON-ASBESTOS - 500°F
316LSS - 1400°F	
321SS - 1500°F	
Monel - 1500°F	PTFE - 500°F
Nickel - 1400°F	
Titanium - 2000°F	THERMICULITE® - 1800°F
Inconel - 600°F - 2000°F	
Hastelloy - 2000°F	CERAMIC - 2300°F




SPIRAL WOUND GASKETS


STYLE LG-13: SPIRAL WOUND with OUTER RING

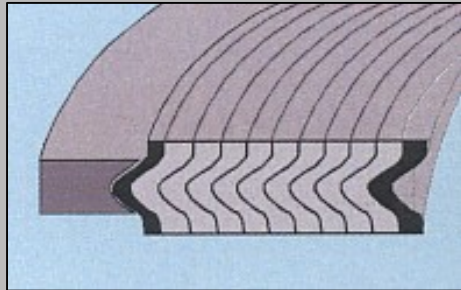


STYLE LG-13-IR: SPIRAL WOUND with INNER and OUTER RING

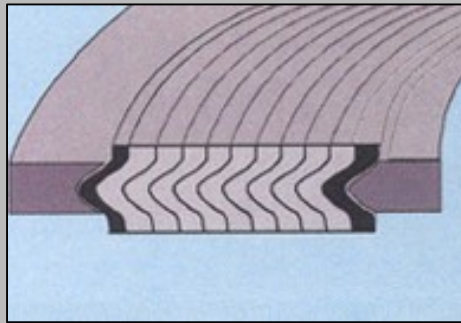

STYLE LG-11-IR: SPIRAL WOUND with INNER RING

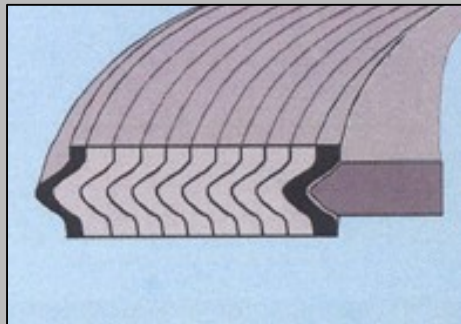

STYLE LG-11: SPIRAL WOUND ONLY

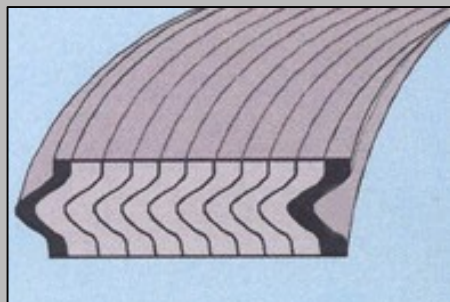

SPIRAL WOUND GASKET with OUTER RING DIMENSIONS 150 to 400 Lbs.

Dimensions Per ASME B16.21							
NOM PIPE SIZE	FILLER O.D.	150 LB		300 LB		400 LB	
		I.D.	O.D.	I.D.	O.D.	I.D.	O.D.
1/4*	7/8	1/2	1-3/4	1/2	1-3/4	1/2	1-3/4
1/2	1-1/4	3/4	1-7/8	3/4	2-1/8	3/4	2-1/8
3/4	1-9/16	1	2-1/4	1	2-5/8	1	2-5/8
1	1-7/8	1-1/4	2-5/8	1-1/4	2-7/8	1-1/4	2-7/8
1-1/4	2-3/8	1-7/8	3	1-7/8	3-1/4	1-7/8	3-1/4
1 ½	2-3/4	2-1/8	3-3/8	2-1/8	3-3/4	2-1/8	3-3/4
2	3-3/8	2-3/4	4-1/8	2-3/4	4-3/8	2-3/4	4-3/8
2 ½	3-7/8	3-1/4	4-7/8	3-1/4	5-1/8	3-1/4	5-1/8
3	4-3/4	4	5-3/8	4	5-7/8	4	5-7/8
3 ½	5-1/4	4-1/2	6-3/8	4-1/2	6-1/2	4-1/2	6-1/2
4	5-7/8	5	6-7/8	5	7-1/8	4-3/4	7
5	7	6-1/8	7-3/4	6-1/8	8-1/2	5-13/16	8-3/8
6	8-1/4	7-3/16	8-3/4	7-3/16	9-7/8	6-7/8	9-3/4
8	10-3/8	9-3/16	11	9-3/16	21-1/8	8-7/8	12
10	12-1/2	11-5/16	13-3/8	11-5/16	14-1/4	10-13/16	14-1/8
12	14-3/4	13-3/8	16-1/8	13-3/8	16-5/8	12-7/8	16-1/2
14	16	14-5/8	17-3/4	14-5/8	19-1/8	14-1/4	19
16	18-1/4	16-5/8	20-1/4	16-5/8	21-1/4	16-1/4	21-1/8
18	20-3/4	18-11/16	21-5/8	18-11/16	23-1/2	18-1/2	23-3/8
20	22-3/4	20-11/12	23-7/8	20-11/16	25-3/4	20-1/2	25-1/2
24	27	24-3/4	28-1/4	24-3/4	30-1/2	24-3/4	30-1/4

SPIRAL WOUND GASKET with OUTER RING DIMENSIONS

600 to 2500 Lbs.

Dimensions Per ASME B16.21									
NOM PIPE SIZE	FILLER O.D.	600 LB		900 LB		1500 LB		2500 LB	
		I.D.	O.D.	I.D.	O.D.	I.D.	O.D.	I.D.	O.D.
1/4*	7/8								
1/2	1-1/4	3/4	2-1/2	3/4	2-1/2	3/4	2-1/2	3/4	2-3/4
3/4	1-9/16	1	2-3/4	1	2-3/4	1	2-3/4	1	2-3/4
1	1-7/8	1-1/4	3-1/8	1-1/4	3-1/8	1-1/4	3-1/8	1-1/4	3-3/8
1-1/4	2-3/8	1-9/16	3-1/2	1-9/16	3-1/2	1-9/16	3-1/2	1-9/16	4-1/8
1 ½	2-3/4	2-1/8	3-3/4	1-7/8	3-7/8	1-7/8	3-7/8	1-7/8	4-5/8
2	3-3/8	2-3/4	4-3/8	2-5/16	5-5/8	2-5/16	5-5/8	2-5/16	5-3/4
2 ½	3-7/8	3-1/4	5-1/8	3-1/4	6-1/2	3-1/4	6-1/2	3-1/4	6-5/8
3	4-3/4	4	5-7/8	3-3/4	6-5/8	3-5/8	6-7/8	3-5/8	7-3/4
3 ½	5-1/4	4-1/2	6-1/2	4-1/8	7-1/2	4-1/8	7-3/8		
4	5-7/8	4-3/4	7-5/8	4-3/4	8-1/8	4-5/8	8-1/4	4-5/8	9-1/4
5	7	5-13/16	9-1/2	5-13/16	9-3/4	5-5/8	10	5-5/8	11
6	8-1/4	6-7/8	10-1/2	6-7/8	11-3/5	6-3/4	11-1/8	6-3/4	12-1/2
8	10-3/8	8-7/8	12-5/8	8-7/8	14-1/8	8-1/2	13-7/8	8-1/2	15-1/4
10	12-1/2	10-13/16	15-3/4	10-13/16	17-1/8	10-5/8	17-1/8	10-5/8	18-3/4
12	14-3/4	12-7/8	18	12-7/8	19-5/8	12-3/4	20-1/2	12-3/4	21-5/8
14	16	14-1/4	19-3/8	14-1/4	20-1/2	14-1/4	22-3/4		
16	18-1/4	16-1/4	22-1/4	16-1/4	22-5/8	16-1/4	25-1/4		
18	20-3/4	18-1/2	24-1/8	18-1/4	25-1/8	18-1/4	27-3/4		
20	22-3/4	20-1/2	26-7/8	20-1/4	27-1/2	20-1/4	29-3/4		
24	27	24-3/4	31-1/8	24-1/4	33	24-1/4	35-1/2		